


Tuff Trac® TPO Roof Walkway

Herringbone Embossed Pattern

BILTRITE®
THERMOPLASTICS



Our Diamond Plate embossed pattern provides extra traction while the innovative safety edge creates a safe pathway for rooftop traffic.

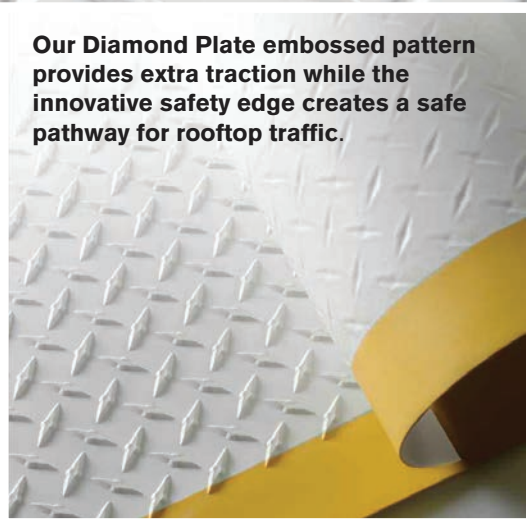

Superior Traction Diamond Plate

Tuff Trac® TPO roof walkway pads and runners offer a safe, simple, economical method of protecting roofs from damage due to roof traffic. Tuff Trac® roof walkway pads help cushion the impact of repetitive foot traffic, protect the underlying roof membrane from damage caused by tool drops, and help absorb the shock that is otherwise transmitted to the roof membrane.

Tuff Trac® TPO roof walkway is manufactured from a fibrous mixture of 55% recycled TPO roofing, specially formulated for outdoor use. Unlike competitive products, it will not expand and contract.

Easy Rooftop Application

Tuff-Trac® TPO Diamond Plate walkway is made with a versatile formula that is compatible with single-ply TPO roof membranes and can be used on new and existing roofs to provide maintenance-free walkways for workers to access air conditioning equipment, water supply or electrical equipment. Installation is quick and easy: simply heat weld the smooth safety edge to new or existing TPO roofs using standard hot air weld equipment.

Tuff Trac® TPO Diamond Plate roof walkway is recommended for protection of TPO roof membrane in areas subjected to frequent foot traffic or maintenance.


Intended Uses

Tuff Trac® TPO roof walkways are frequently used for:

- All access points (ladders, hatches, doorways) to the roof
- Protection near window washing equipment
- Around rooftop equipment that requires periodic maintenance

Installation

- Remove any loose debris and clean TPO roof membrane and allow to dry prior to application of walkway
- Roll out and cut desired length up to 10' (3.05 m) and allow to relax while placing into the desired position
- Install Tuff Trac® TPO roof walkway with a continuous weld around the perimeter

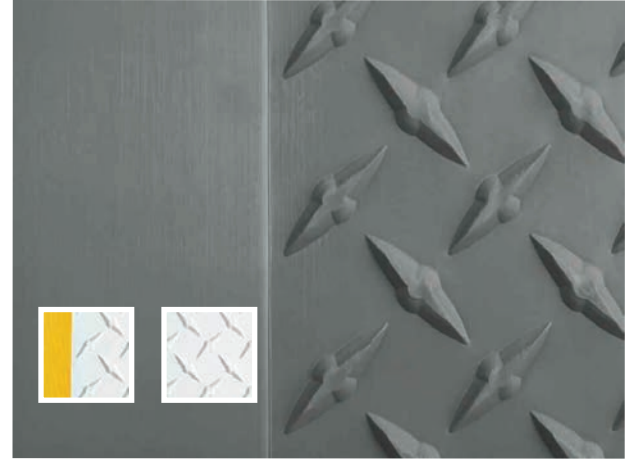

Available in White + Yellow safety border, White, and Gray. (Gray + Yellow safety border available as a special order.)

Tuff Trac® TPO Diamond Plate Embossed Pattern specifications – Item #67-6722-52 (White + Yellow safety border), 67-6722-50 (White), 67-6722-60 (Gray)

PACKAGING:

Roll Size:	34" wide x 50' long (86 cm x 15.2 m)
Roll Weight:	88 lbs. (39 kg)
Color:	Light Gray, White, White + Yellow safety border (edge only)
Thickness, in (mm):	0.170" +/- 0.010" (4.57 mm +/- 0.025 mm)

STANDARD AND METRIC SPECIFICATION

TEST DESCRIPTION	TEST METHOD	RM BILTRITE™ SPECIFICATION
Thickness, in (mm):	ASTM D 412	0.170" +/- 0.010" (4.57 mm +/- 0.025 mm)
Tear Resistance, lbf/in (kN/m):	ASTM D 624	200 PPI (43.8 kN/m)
Elongation:	ASTM D 412	200%
Dimensional Stability:	ASTM D 1204 (2hr, 158°F)	0 +/- 0.5%
Accelerated Weathering:	ASTM G 155	10,080 kj/m²

LEED INFORMATION:

Pre-Consumer Recycled Content	55%
Manufacturing Location:	Chelsea, MA
Rev.	April 2013

Made in the USA by RM Biltrite™ LLC, a leading US manufacturer of engineered thermoplastic products including: building materials, specialty flooring and matting, noise attenuation, gasketing and other products with complex technical requirements.

For more information and samples, contact your local distributor or a RM Biltrite™ representative at (800) 877-8775.



© RM Biltrite, LLC 2018

The following are trademarks of RM Biltrite, LLC: RMBiltrite™, Biltrite®, Tuff Trac®

The following are trademarks of QRR, Inc: RubberMax™

There may be other trademarks of RM Biltrite or other companies noted in this document.

Distributed by: