



TPO Roof Walkway
Herringbone and Diamond Finish



GRAY HERRINGBONE

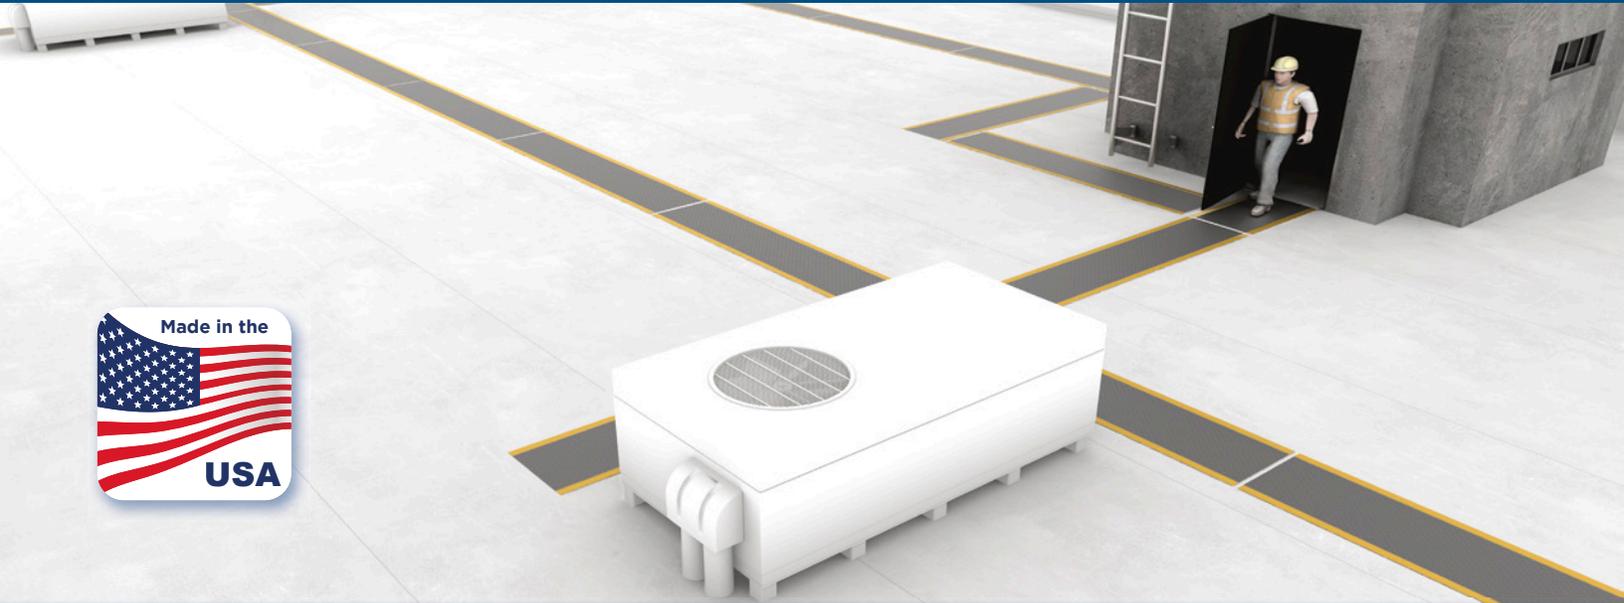

WHITE HERRINGBONE

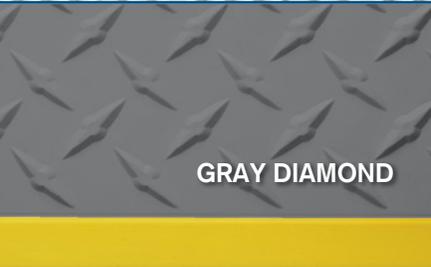

GRAY DIAMOND



WHITE DIAMOND

Safe, Simple, and Economical Roof Protection

RM Biltrite™ Tuff Trac® TPO Roof Walkway is a safe, simple, and economical way to protect roofs from damage caused by foot traffic, maintenance, and rooftop equipment. It protects the roof membrane by cushioning impact, absorbing shock, and acting as a barrier from outside elements. Perfect to use as walkways for workers accessing air conditioning, water supply, or electrical equipment.

Tuff Trac® TPO Roof Walkway is specifically engineered for outdoor use. It is manufactured with a unique fibrous mixture and will neither expand nor contract due to temperature or weather. TPO Roof Walkway is compatible with both new and existing single-ply TPO roof membranes and can be easily installed using standard hot air welding equipment.

Tuff Trac® TPO Roof Walkway products are environmentally friendly and 100% recyclable. The specialized TPO formula is also certified for anti-fire and anti-slip resistance at the highest levels- approved by German, British, European, and USA standards. Available in two anti-slip finishes:

Herringbone-Embossed Finish: Provides excellent protection and good slip reduction. Good for use on roofs with normal slip risk. Comes in gray and white; available with optional yellow safety edge.

Diamond-Embossed Finish: Provides excellent protection, better traction, and superior slip reduction. Good for use on roofs with heightened slip risk. Available in gray and white; comes with flat yellow safety edge.

TPO WALKWAY SPECIFICATIONS	HERRINGBONE FINISH	DIAMOND FINISH
Thickness: ASTM D412	5/32" ± 0.01" (3.968 mm ± 0.025 mm)	0.17" ± 0.01" (4.318 mm ± 0.025 mm)
Tear Resistance: ASTM D624	250.1 lbf/ft (43.8 kN/m)	250.1 lbf/ft (43.8 kN/m)
Elongation: ASTM D412	200%	200%
Accelerated Weathering: ASTM G155	4797 ft-lb/in ² (10,080 kJ/m ²)	4797 ft-lb/in ² (10,080 kJ/m ²)
Pendulum Test (Slip Resistance): BS 7976-2 104/40.2	84/46	-
Ramp Test (Anti-Slip): DIN 51130 R10	R9	-
Displacement Test: DIN 51130	V10 (16.0 cm ³ /dm ²)	-
Fire Resistance Test: EN 13501 E	E	-
Surface Finish:	Herringbone	Diamond
Back Finish:	Smooth	Smooth
Color:	Gray, White Optional yellow safety edge available	Gray, White With flat yellow safety edge
Roll Size (W x L):	30" x 50' (76.2 cm x 15.2 m)	34" x 50' (86.4 cm x 15.2 m)
Roll Weight:	75 lbs (34.0 kg)	78 lbs (35.4 kg)
Rolls Per Pallet:	16	16
Pallet Size:	48" x 48" (121.9 cm x 121.9 cm)	48" x 48" (121.9 cm x 121.9 cm)
Pallet Weight:	49.1 lbs (22.3 kg)	49.1 lbs (22.3 kg)
HS Code:	3902200010 TPO	3902200010 TPO
Item ID #s:	Gray: #67672052 + Yellow Safety Edge: #67672054 White: #67672061 + Yellow Safety Edge: #67672062	White: #67672251 Gray: #67672261



LEED Information

- Recycled Content: 3-5% (Post-Production)
- Raw Materials: 95-97% (Non-Recyclable)
- Recyclable: 100%
- Does not contain VOCs

*In-stock roof walkway products, readily available for shipping. Our state of the art US manufacturing facility is also able to create a wide variety of additional custom colors, sizes and private labeling options upon request. Contact us at 800.877.8775 or sales@rmbilrite for more information.

Made in the USA by RM Bilrite™ LLC, a leading US manufacturer of engineered thermoplastic products including: building materials; specialty flooring and matting; noise attenuation; gasketing; and other products with complex technical requirements.

For samples and more product information, please contact your local distributor or an RM Bilrite™ representative at 800.877.8775.



© RM Bilrite, LLC 2018

The following are trademarks of RM Bilrite, LLC: RMBilrite™, Bilrite®, Tuff Trac®

The following are trademarks of QRRl, Inc: RubberMax™

There may be other trademarks of RM Bilrite or other companies noted in this document.

Revised January 1, 2020

Distributed by:

P: (800) 877-8775 | F: (888) 894-0204
sales@rmbilrite.com | www.rmbilrite.com
8525 Dunwoody Pl | Sandy Springs, GA 30350