


## PVC Roof Walkway

Herringbone and Pyramid Finish

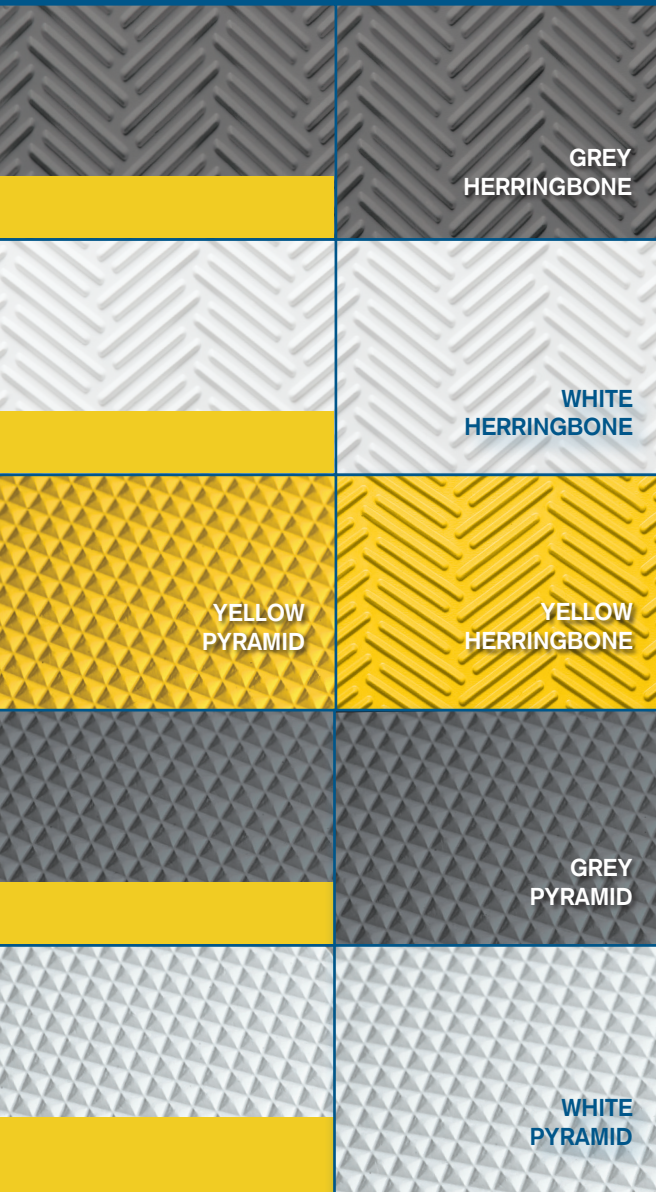

### Safe, Simple, and Economical Roof Protection

**RM Biltrite™ Tuff Trac® PVC Roof Walkway** is a safe, simple, and economical way to protect roofs from damage caused by foot traffic, maintenance, and rooftop equipment. It protects the roof membrane by cushioning impact, absorbing shock, and acting as a barrier from outside elements. Perfect to use as walkways for workers accessing air conditioning, water supply, or electrical equipment.

**Tuff Trac® PVC Roof Walkway** is specifically engineered for outdoor use. It is manufactured with a unique fibrous mixture and will neither expand nor contract due to temperature or weather. PVC Roof Walkway is compatible with both new and existing single-ply PVC roof membranes and can be easily installed using standard hot air welding equipment.

**Tuff Trac® PVC Roof Walkway** products are environmentally friendly and 100% recyclable. The specialized PVC formula is also certified for anti-fire and anti-slip resistance at the highest levels- approved by German, British, European, and USA standards. Available in two anti-slip finishes:

**Herringbone-Embossed Finish:** High profile finish. Provides excellent protection, better traction, and superior slip reduction. Engineered for roofs with sustained heavy foot traffic and continuous impact from dropped tools and equipment edges. Comes in grey, white, and yellow. Grey and white are available with optional yellow border.

**Pyramid-Embossed Finish:** Low profile finish. Provides good protection and slip reduction. Good for use on roofs with normal slip risk, traffic, and servicing. Comes in grey, white, and yellow. Grey and white are available with optional yellow border.

PVC WALKWAY SPECIFICATIONS	HERRINGBONE ROLLS	HERRINGBONE PADS	PYRAMID ROLLS
<b>Thickness:</b> ASTM D412	5/32" ± 0.01" (3.968 mm ± 0.025 mm)	1/4" ± 0.01" (6.350 mm ± 0.025 mm)	0.09" ± 0.01" (2.286 mm ± 0.025 mm)
<b>Tear Resistance:</b> ASTM D624	250.1 lbf/ft (43.8 kN/m)	> 250.1 lbf/ft (43.8 kN/m)	150 lbf/in (26.3 kN/m)
<b>Elongation:</b> ASTM D412	200%	200%	200%
<b>Dimensional Stability:</b> ASTM D1204 (2hr @ 158 °F/70 °C)	0 ± 0.50%	0 ± 0.50%	0.25% (max change)
<b>Accelerated Weathering:</b> ASTM G155	4797 ft-lb/in <sup>2</sup> (10,080 kJ/m <sup>2</sup> )	4797 ft-lb/in <sup>2</sup> (10,080 kJ/m <sup>2</sup> )	Pass @ 5,000 hrs
<b>Pendulum Test (Slip Resistance):</b> Europe - BS 7976-2 104/40.2	84/46	84/46	-
<b>Ramp Test (Anti-Slip):</b> Europe - DIN 51130 R10	R9	R9	-
<b>Displacement Test:</b> Europe - DIN 51130	V10 (16.0 cm <sup>3</sup> /dm <sup>2</sup> )	V10 (16.0 cm <sup>3</sup> /dm <sup>2</sup> )	-
<b>Fire Resistance Test:</b> Europe - EN 13501 E	E	E	-
<b>Color:</b>	Grey, White, Yellow	Grey, Yellow	Grey, White, Yellow
<b>Surface Finish:</b>	Herringbone	Herringbone	Pyramid
<b>Back Finish:</b>	Smooth	Grey: Cloth Yellow: Smooth	Smooth
<b>Item Size (W x L):</b>	30" x 50' (76.2 cm x 15.2 m)	24" x 48" (60.9 cm x 121.9 cm)	30" x 50' (76.2 cm x 15.2 m)
<b>Item Weight:</b>	125 lbs (56.7 kg)	14 lbs (6.4 kg)	90 lbs (40.8 kg)
<b>Items Per Pallet:</b>	16	125	20
<b>Pallet Size:</b>	48" x 48" (121.9 cm x 121.9 cm)	40" x 48" (101.6 cm x 121.9 cm)	40" x 48" (101.6 cm x 121.9 cm)
<b>Pallet Weight:</b>	49.1 lbs (22.3 kg)	45 lbs (20.4 kg)	45 lbs (20.4 kg)
<b>HS Code:</b>	3904300020 PVC	3904300020 PVC	3904300020 PVC
<b>Item ID #s:</b>	<b>Grey:</b> #67670129 <b>White:</b> #67670101 <b>Yellow:</b> #67671725 <b>Grey + Yellow Border:</b> #67670130 <b>White + Yellow Border:</b> #67670102	<b>Grey:</b> #67671001 <b>Yellow:</b> #67670116	<b>Grey:</b> #67670133 <b>White:</b> #67670135 <b>Yellow:</b> #67670137 <b>Grey + Yellow Border:</b> #67670134 <b>White + Yellow Border:</b> # 67670136



#### LEED Information

- Recycled Content: 3-5% (Post-Production)
- Raw Materials: 95-97% (Non-Recyclable)
- Recyclable: 100%
- Does not contain VOCs

Custom sizes available upon request.

Private labeling available.

Made in the USA by RM Biltrite™ LLC, a leading US manufacturer of engineered thermoplastic products including: building materials; specialty flooring and matting; noise attenuation; gasketing; and other products with complex technical requirements.

**For samples and more product information, please contact your local distributor or an RM Biltrite™ representative at 800.877.8775.**



© RM Biltrite, LLC 2018

The following are trademarks of RM Biltrite, LLC: RMBiltrite™, Biltrite®, Tuff Trac®

The following are trademarks of QRRl, Inc: RubberMax™

There may be other trademarks of RM Biltrite or other companies noted in this document.

Revised November 1, 2018

Distributed by:

P: (800) 877-8775 | F: (888) 894-0204  
sales@rmbiltrite.com | www.rmbiltrite.com  
8525 Dunwoody PI | Sandy Springs, GA 30350