


PVC Roof Walkway
Herringbone and Pyramid Finish



GRAY
HERRINGBONE

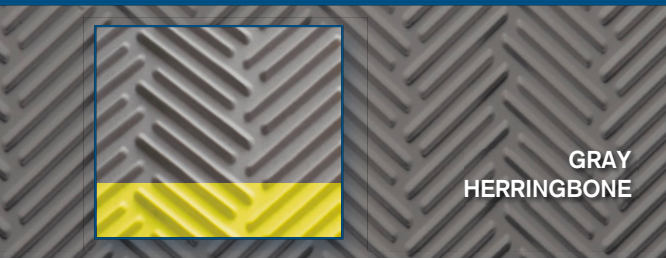

WHITE
HERRINGBONE



YELLOW
HERRINGBONE



GRAY
PYRAMID



WHITE
PYRAMID

Safe, Simple, and Economical Roof Protection

RM Biltrite™ Tuff Trac® PVC Roof Walkway is a safe, simple, and economical way to protect roofs from damage caused by foot traffic, maintenance, and rooftop equipment. It protects the roof membrane by cushioning impact, absorbing shock, and acting as a barrier from outside elements. Perfect to use as walkways for workers accessing air conditioning, water supply, or electrical equipment.

Tuff Trac® PVC Roof Walkway is specifically engineered for outdoor use. It is manufactured with a unique fibrous mixture and will neither expand nor contract due to temperature or weather. PVC Roof Walkway is compatible with both new and existing single-ply PVC roof membranes and can be easily installed using standard hot air welding equipment.

Tuff Trac® PVC Roof Walkway products are environmentally friendly and 100% recyclable. The specialized PVC formula is also certified for anti-fire and anti-slip resistance at the highest levels- approved by German, British, European, and USA standards. Available in two anti-slip finishes:

Herringbone-Embossed Finish: High profile finish. Provides excellent protection, better traction, and superior slip reduction. Engineered for roofs with sustained heavy foot traffic and continuous impact from dropped tools and equipment edges. Comes in gray, white, and yellow. Gray and white are available with optional yellow border.

Pyramid-Embossed Finish: Low profile finish. Provides good protection and slip reduction. Good for use on roofs with normal slip risk, traffic, and servicing. Comes in gray, white, and yellow. Gray and white are available with optional yellow border.

PVC WALKWAY SPECIFICATIONS	HERRINGBONE ROLLS	HERRINGBONE PADS	PYRAMID ROLLS
Thickness: ASTM D412	5/32" ± 0.01" (3.968 mm ± 0.025 mm)	1/4" ± 0.01" (6.350 mm ± 0.025 mm)	0.09" ± 0.01" (2.286 mm ± 0.025 mm)
Tear Resistance: ASTM D624	250.1 lbf/ft (43.8 kN/m)	> 250.1 lbf/ft (43.8 kN/m)	150 lbf/in (26.3 kN/m)
Elongation: ASTM D412	200%	200%	200%
Accelerated Weathering: ASTM G155	4797 ft-lb/in ² (10,080 kJ/m ²)	4797 ft-lb/in ² (10,080 kJ/m ²)	Pass @ 5,000 hrs
Pendulum Test (Slip Resistance): Europe - BS 7976-2 104/40.2	84/46	84/46	-
Ramp Test (Anti-Slip): Europe - DIN 51130 R10	R9	R9	-
Displacement Test: Europe - DIN 51130	V10 (16.0 cm ³ /dm ²)	V10 (16.0 cm ³ /dm ²)	-
Fire Resistance Test: Europe - EN 13501 E	E	E	-
Color:	Gray, White, Yellow	Gray, Yellow	Grey, White, Yellow
Surface Finish:	Herringbone	Herringbone	Pyramid
Back Finish:	Smooth	Gray: Cloth Yellow: Smooth	Smooth
Item Size (W x L):	30" x 50' (76.2 cm x 15.2 m)	24" x 48" (60.9 cm x 121.9 cm)	30" x 50' (76.2 cm x 15.2 m)
Item Weight:	125 lbs (56.7 kg)	14 lbs (6.4 kg)	90 lbs (40.8 kg)
Items Per Pallet:	16	125	20
Pallet Size:	48" x 48" (121.9 cm x 121.9 cm)	40" x 48" (101.6 cm x 121.9 cm)	40" x 48" (101.6 cm x 121.9 cm)
Pallet Weight:	49.1 lbs (22.3 kg)	45 lbs (20.4 kg)	45 lbs (20.4 kg)
HS Code:	3904300020 PVC	3904300020 PVC	3904300020 PVC
Item ID #s:	Gray: #67670129 White: #67670101 Yellow: #67671725 Gray + Yellow Border: #67670130 White + Yellow Border: #67670102	Gray: #67671001 Yellow: #67670116	Gray: #67670133 White: #67670135 Yellow: #67670137 Gray + Yellow Border: #67670134 White + Yellow Border: # 67670136



LEED Information

- Recycled Content: 3-5% (Post-Production)
- Raw Materials: 95-97% (Non-Recyclable)
- Recyclable: 100%
- Does not contain VOCs

*In-stock roof walkway products, readily available for shipping. Our state of the art US manufacturing facility is also able to create a wide variety of additional custom colors, sizes and private labeling options upon request. Contact us at 800.877.8775 or sales@rmbiltrite for more information.

Made in the USA by RM Biltrite™ LLC, a leading US manufacturer of engineered thermoplastic products including: building materials; specialty flooring and matting; noise attenuation; gasketing; and other products with complex technical requirements.

For samples and more product information, please contact your local distributor or an RM Biltrite™ representative at 800.877.8775.



© RM Biltrite, LLC 2018

The following are trademarks of RM Biltrite, LLC: RMBiltrite™, Biltrite®, Tuff Trac®

The following are trademarks of QRR, Inc: RubberMax™

There may be other trademarks of RM Biltrite or other companies noted in this document.

Revised January 1, 2020

Distributed by:

P: (800) 877-8775 | F: (888) 894-0204
sales@rmbiltrite.com | www.rmbiltrite.com
8525 Dunwoody PI | Sandy Springs, GA 30350